

TECHNICAL REFERENCE GUIDE

VACUUM/PRESSURE

TO CONVERT FROM	PASCAL	TORR	ATM	MBAR	MICRON	PSIA	IN HG. ABS
pascal	1	7.5×10^{-3}	9.87×10^{-6}	0.01	7.5	1.45×10^{-4}	2.95×10^{-4}
torr (mm Hg)	133	1	1.315×10^{-3}	1.333	1000	0.01934	0.0394
atmosphere	1.013×10^5	760	1	1013	7.6×10^5	14.7	29.92
millibar (mbar)	100	0.75	9.87×10^{-4}	1	750.1	0.0145	0.0295
micron	0.1333	0.001	1.316×10^{-6}	1.333×10^{-3}	1	1.934×10^{-5}	3.94×10^{-5}
psia	6.89×10^3	51.71	0.068	68.9	5.17×10^4	1	2.036
in. Hg Abs	3.39×10^3	25.4	0.03342	33.9	2.54×10^4	0.4912	1

←
Standard atmospheric pressure

PUMPING SPEED/LEAK RATE

FROM	MULTIPLY BY	TO
------	-------------	----

PUMP SPEED, S

ft ³ /min	.1697	m ³ /hr
m ³ /hr	0.589	ft ³ /min
liters/sec	3.6	m ³ /hr
liters/sec	2.12	ft ³ /min

GAS FLOW RATE, Q

atm-cc/sec	1.013	mbar-liter/sec
atm-cc/sec	0.76	torr-liter/sec
torr-liter/sec	1.33	mbar-liter/sec

ELEVATION VS VACUUM

ELEVATION (FT)	MAX RELATIVE VACUUM (IN HG)	PERCENT LOSS
0 (sea level)	29.92	0%
1,000	28.85	3.6%
2,000	27.82	7.0%
3,000	26.82	10.4%
4,000	25.84	13.6%
5,000	24.89	16.8%
6,000	23.98	19.9%
7,000	23.06	22.9%
8,000	22.20	25.7%
9,000	21.38	28.5%
10,000	20.58	31.2%


CFM - SCFM - ACFM

- CFM—cubic feet per minute, displacement of pump chamber at 100% efficiency
- SCFM—standard cubic feet per minute, mass flow of air at standard conditions
- ACFM—actual cubic feet per minute, volumetric flow of gas that has been expanded

$$ACFM = SCFM \times \frac{760}{P}$$

P = pressure in Torr

ABSOLUTE VS RELATIVE PRESSURE

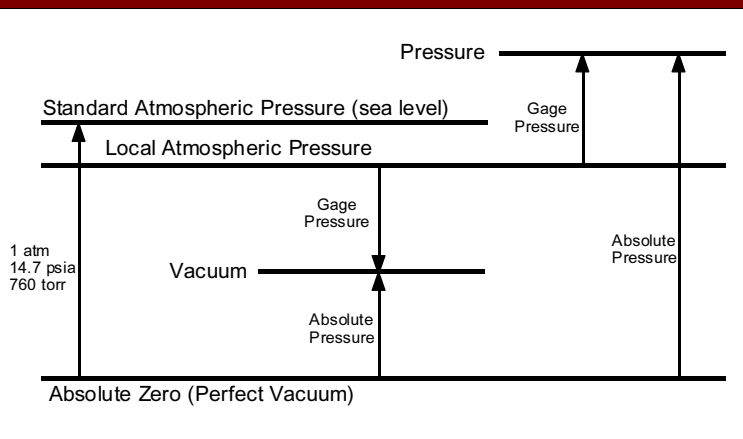

VACUUM LIQUID AIR

Phone 801.486.1015 | 138 West 2260 South
 Fax: 801.486.1032 | Salt Lake City, UT 84115
www.fluidxequipment.com