

Grounded Silicone Rubber Extruded Heating Tape


Approvals:

- CE
- UR pending

Grounded Silicone Rubber Extruded 450°F/ 232°C Continuous, 500°F/ 260°C Short Term.

Size A		Size B		Total Watts	Part No. (120VAC)	Part No. (240VAC)
inches	cm	inches	cm			
1	2.5	24	60	104	BS0101020LG*	N/A
1	2.5	48	122	209	BS0101040LG*	BS0102040LG*
1	2.5	72	183	313	BS0101060LG*	BS0102060LG*
1	2.5	96	244	418	BS0101080LG*	BS0102080LG*
1	2.5	120	305	522	BS0101100LG*	BS0102100LG*

* No plug included

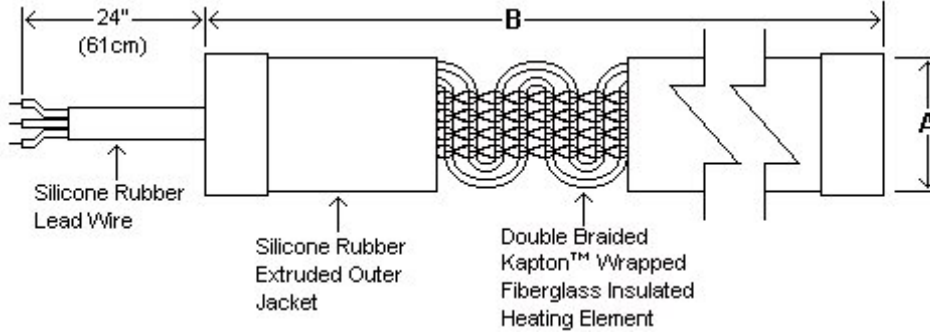


Grounded Silicone Rubber Heating Tapes are moisture and chemical resistant and are suitable for use on conductive surfaces.

General Purpose Heating Tape with Percentage Controller

The BSAT controller varies the proportion of “off” and “on” time of the heater. Thermal characteristics of the heated item will determine the actual percentage setpoint required. The controller does not use a temperature sensor and therefore satisfactory operation requires occasional supervision under changing load conditions.

General Purpose Silicone Insulated 450°F/ 232°C Continuous, 500°F/ 260°C Short Term.

Size A		Size B		Total Watts	Part No. (120VAC)	Part No. (240VAC)
inches	cm	inches	cm			
1	2.5	24	60	144	BSAT101002	BSAT102002
1	2.5	48	122	288	BSAT101004	BSAT102004
1	2.5	72	183	432	BSAT101006	BSAT102006
1	2.5	96	244	576	BSAT101008	BSAT102008
1	2.5	120	305	720	BSAT101010	BSAT102010

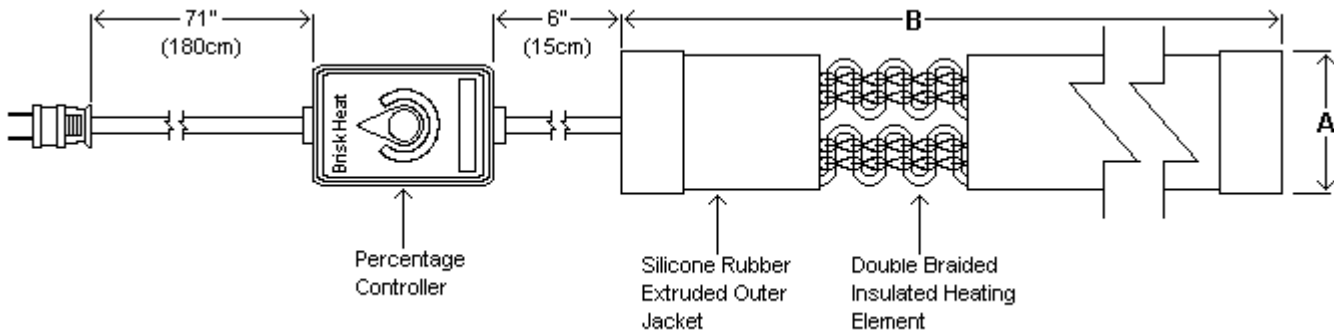

General Purpose Heating Tapes are moisture and chemical resistant and are suitable for use on conductive surfaces.